

Aluminum Case Pressure Chart Recorders



Palmer Aluminum Case Pressure Chart Recorders provide proven reliability for accurate measurement and recording of pressure in many applications. Since 1962 we have manufactured and supplied recorders for industry in the U.S. and around the world. Palmer Recorders are designed for indoor or outdoor use, and provide long service life, even in harsh conditions. Many of our Recorders are still in service after 50 years!

Each Recorder is custom made to order, enabling you to specify the options necessary for your requirements.

Palmer Recorders are available in 8" or 12" models in heavy die cast aluminum and come complete with a battery operated chart drive and up to three (3) felt tip pens. Electric or Spring Wound chart drives are also available. Case mounting styles are Wall, Flush, Pedestal, Pipestand or Portable. The many combinations of case mounts and internals we offer allow selections which will meet your specific requirements without limiting performance or demanding a custom price.

Aluminum Case Features

- The heavy-duty die cast aluminum case has a corrosion resistant under coat and a top White Powder Coat for a long lasting corrosion resistant finish, even in extreme environments. Black Powder Coat or Gray Powder Coat are available.
- The case is heat treated to prevent distortion or warping. Doors and windows are weather tight, and can be selected as solid or with a glass or plexiglass window. Shatter-proof glass is also available.
- Doors close with a draw pull latch with hasp. Flush Mount case closes with a black lever handle. Double cam latch bar with padlock type handle is available as an option on a solid door.
- Temperature and/or pressure connections are located at the back, top, or bottom of case, depending on mounting style or your specific requirements.
- Pressure Recorders have 1/2" diameter air vent holes in case. All internal components are corrosion resistant.

Aluminum Case Styles

Wall Mount - Supplied with pressure connection at the bottom of case unless otherwise specified.

Flush Mount - Supplied with pressure connection at the back of the case. Black lever handle standard.

Pipestand Mount - Supplied with pressure connection at the bottom of case unless otherwise specified.

Portable - Supplied with pressure connection at the back of the case unless otherwise specified.

Pedestal Mount - Supplied with pressure connection at the back of the case unless otherwise specified.


Case Dimensions: (Exterior box only, depending on case style)

8 inch Case - 10-9/16" Wide x 13-5/8" High x 4-7/8" Deep
(268.3 x 346.0 x 123.8 mm).

12 inch Case - 13-1/16" Wide x 15-13/16" High x 4-7/8" Deep
(331.8 x 401.6 x 123.8 mm).

Case Weight: (Empty box only, depending on mounting style)

8 inch Case - 12 lbs (5.44 kg). 12 inch Case - 16 lbs (7.25 kg).

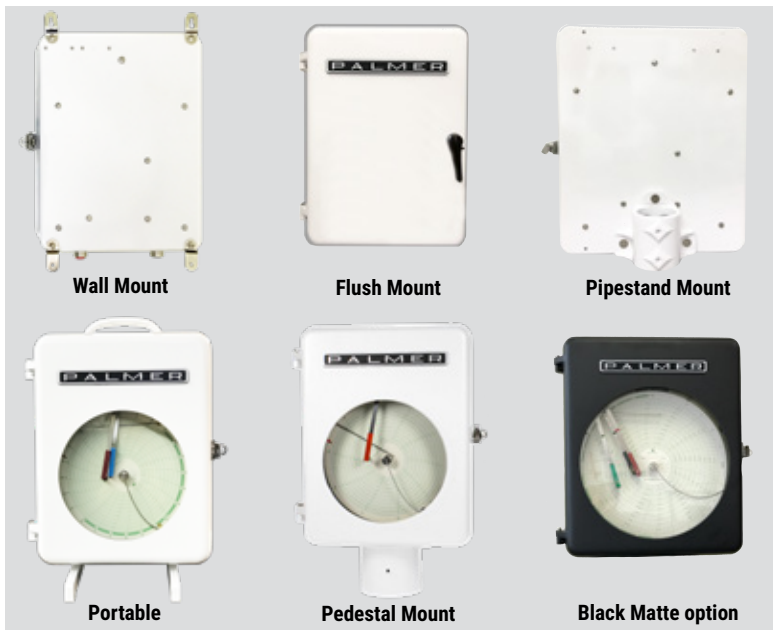

Specifications subject to change without notice.


Chart Drives - Flexibility for the Field

Quartz Multi-Speed Chart Drives offer complete flexibility for recording - even in the most demanding applications

Designed for outdoor use, Palmer's hermetically sealed PC-11 and PC-12 chart drives have a broad operating temperature range of -40°F to 160°F and operate reliably even in wet or dirty environments. Freezer tested to -40°F, they will withstand extreme temperatures below 10°F when used with a "C" size 3.6V Lithium Thionyl Chloride Battery. The highly adaptable design will fit any chart recorder, and makes exchange in the field a snap.

The multi speed dial on the front of the case allows field selectable recording intervals from 30 minutes (PC-12) to 32 days (PC-11). The dial also turns the unit off to conserve battery power (PC-11 model). A pulsating LED indicator behind the dial shows that the battery is charged and that the unit is operating.

Our PC-11 and PC-12 are rated Intrinsically Safe, which makes them ideal for use by gas utility companies and in other situations where hazardous or combustible materials are present.

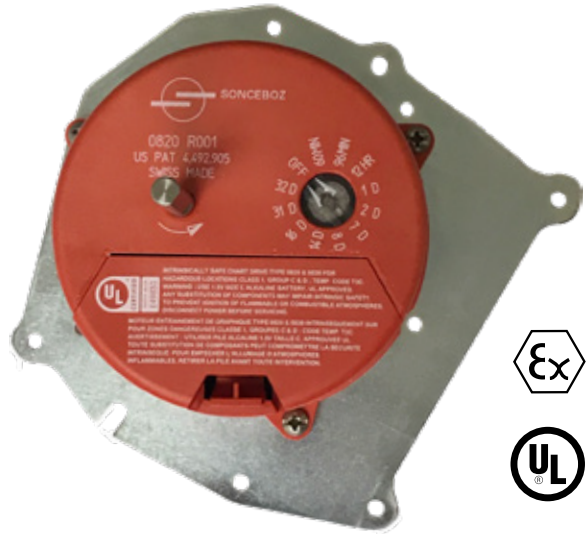

PC-11 & PC-12 Clock Features

- PC-11 - 11 Speeds: switch selectable, choose from 60 min., 96 min., 12 hr., 24 hr., 48 hr., 7 day, 8 day, 14 day, 16 day, 31 day or 32 day recording intervals and OFF.
- PC-12 - 12 Speeds: switch selectable, choose from 30 min., 60 min., 2 hr., 4 hr., 6 hr., 8 hr., 12 hr., 24 hr., 48 hr., 3 day, 4 day, or 7 day recording intervals. No OFF.
- Universal Mounting Bracket: fits all chart recorders for easy replacement.
- .25" Drive Shaft with flat: accepts different drive hubs.
- High Torque: 25 oz/in torque increases life and improves accuracy.
- No Axial or Angular Backlash: charts don't shift.
- Battery: 1.5 volt "C" alkaline battery (not included). For temperatures below 10°F use with a "C" size 3.6V Lithium Thionyl Chloride Battery.
- Molded Body Pilot: Permits field exchange without recalibration.
- Maintenance-Free: Closed construction case protects all moving parts.
- Separate Battery Compartment: prevents drive damage from corrosion.
- UL Listed: Class I, Groups C and D, Intrinsically Safe, CSA Certified.

Spring Wound Chart Drive

Switchable Dual Speed Clock. - By use of a shift lever, the drive can be set for 24 hour or 7 day rotation. Rotation is set at factory to conform to your specifications. Verify that the drive is set properly. To wind the drive, remove chart and use the key furnished with the recorder.

Standard Rotation: 24 hour / 7 day

Special Order Rotations:

Dual Speed: 15 minute / 1 hour

1 hour / 3 hour

2 hour / 8 hour

96 minute / 24 hour

Single Speed: 4 hour



Electric Chart Drive

When installing, check to verify that proper voltage and frequency are used.

Not available for DP Recorders.

Standard Rotation: 7 day, 110/120V - 60 Hz

Optional Rotation: 24 hr, 110/120V - 60 Hz

Special Order Rotations:

12 hr, 110/120V - 60Hz 1 hr, 220V - 50 Hz

2 day, 110/120V - 60Hz 24 hr, 220V - 50 Hz

24 hr, 110V - 50Hz 7 day, 220V - 60Hz



Clocks, batteries, charts, pens, liquid infiltration, case finish, and window are not included in the 10 year warranty.

Available clock rotations FOR ALL CLOCKS: Select one for Factory Setting

Code	Rotation Options	PC-11	PC-12	Spring Wound	110V Clock	220V Clock
A	15 Min			Special Order		
B	30 Min		✓			
C	60 Min	✓	✓	Special Order		Special Order
D	96 Min	✓		Special Order		
E	2 Hour		✓	Special Order		
X	3 Hour			Special Order		
F	4 Hour		✓	Special Order		
G	6 Hour		✓			
H	8 Hour		✓	Special Order		
J	12 Hour	✓	✓		Special Order	
K	24 Hour	✓	✓	✓	✓	Special Order
L	48 Hour	✓	✓		Special Order	
M	3 Day		✓			
N	4 Day		✓			
P	7 Day	✓	✓	✓	✓	Special Order
R	8 Day	✓				
S	14 Day	✓				
T	16 Day	✓				
U	31 Day	✓				
V	32 Day	✓				

Specifications subject to change without notice.

Palmer Pressure Elements and Ranges

Pressure Elements

Each Palmer Pressure Element is individually designed and calibrated for each selected pressure range span. Palmer subjects these elements to extensive testing during calibration to ensure better than specified accuracy. The all-welded system prevents deterioration.

- Accuracy: $\pm 1/2$ chart graduation.
Optional: $\pm 1/4$ chart graduation - available on the Top Pen only, for ranges 30 to 10,000 PSI only (using the Standard Pressure Element only). (Factory setting only). Not available on DP Recorder.
- Angular deflection of the pen arm of 22.5° for 8" Case and 36° for 12" Case.
- Standard pressure ranges are available in pounds per square inch, bar, inches of water, inches of mercury, kilopascals, and ounces per square inch.
- All welded construction offers over-range protection for ranges over 10,000 PSI and up to 30,000 PSI.
- Ranges 10,000 PSI and under come standard with 1/4" NPT female connection. 10,000 PSI may choose an optional Autoclave fitting. Ranges above 10,000 require a 9/16"-18 UNF high pressure female Autoclave style fitting. (Also requires user supplied tubing assembly).
- Pre-calibrated pressure elements for field replacement are also available.

Low Pressure Element:
316 Stainless Steel bellows diaphragm, tubing and fittings for ranges below 30 PSI with 1/4" NPT.



Standard Pressure Element:
316 Stainless Steel helical coil bourdon tube with Stainless Steel Fittings and tubing for ranges 30 to 10,000 PSI, with 1/4" NPT.

High Pressure Element: 316 Stainless Steel helical coil bourdon tube for ranges 10,000 PSI, 15,000, 20,000 and 30,000 PSI with autoclave fitting (with calibration on rise only for 15,000 and above.)



Pressure Ranges

Chart Recorder Standard Pressure Ranges							
PSI Ranges			Hg Ranges	kPa Ranges	in H ₂ O Ranges	Bar Ranges	
0 to 1 PSI*	0 to 75 PSI*	0 to 1,500 PSI	0 to 10 Hg	0 to 5 kPa	0 to 10 in H ₂ O	0 to 6 Bar*	0 to 250 Bar
0 to 3 PSI*	0 to 100 PSI*	0 to 2,000 PSI	0 to 30 Hg	0 to 20 kPa	0 to 15 in H ₂ O	0 to 10 Bar*	0 to 300 Bar
0 to 5 PSI*	0 to 120 PSI*	0 to 2,500 PSI	0 to 50 Hg	0 to 80 kPa	0 to 20 in H ₂ O	0 to 16 Bar*	0 to 400 Bar
0 to 6 PSI*	0 to 150 PSI*	0 to 3,000 PSI	oz/in2 Ranges	0 to 100 kPa	0 to 25 in H ₂ O	0 to 25 Bar*	0 to 500 Bar
0 to 8 PSI*	0 to 200 PSI*	0 to 4,000 PSI	0 to 10 oz/in2	0 to 500 kPa	0 to 30 in H ₂ O	0 to 40 Bar*	0 to 600 Bar
0 to 10 PSI*	0 to 250 PSI*	0 to 5,000 PSI	0 to 15 oz/in2	0 to 800 kPa	0 to 40 in H ₂ O	0 to 50 Bar*	0 to 1,000 Bar
0 to 15 PSI*	0 to 300 PSI*	0 to 6,000 PSI	0 to 20 oz/in2	0 to 1,000 kPa	0 to 50 in H ₂ O	0 to 60 Bar*	0 to 1,200 Bar
0 to 20 PSI*	0 to 350 PSI*	0 to 8,000 PSI	0 to 25 oz/in2	0 to 2,000 kPa	0 to 60 in H ₂ O	0 to 100 Bar	0 to 1,600 Bar
0 to 25 PSI*	0 to 400 PSI*	0 to 10,000 PSI	0 to 30 oz/in2	0 to 5,000 kPa	0 to 100 in H ₂ O	0 to 160 Bar	0 to 2,000 Bar
0 to 30 PSI*	0 to 500 PSI*	0 to 15,000 PSI	0 to 50 oz/in2			0 to 200 Bar	
0 to 35 PSI*	0 to 600 PSI*	0 to 20,000 PSI					
0 to 45 PSI*	0 to 750 PSI*	0 to 30,000 PSI					
0 to 50 PSI*	0 to 800 PSI*						
0 to 60 PSI*	0 to 1,000 PSI*						

Note: Beige boxes denote Static Pressure Ranges available for additional pens on a DP Recorder.

* Pressure Ranges available for Test & Valve Recorders.

We build to order:
if your process requires an option not shown here please call Customer Service.

Process Connections

- 1/4" FNPT, Standard
- 1/2" FNPT, Optional
- 9/16"-18 UNF High Pressure Female Autoclave style fitting required on PSI ranges 15,000 and above, optional for 10,000 PSI.



Standard Pressure Connection:
1/4" FNPT Female pressure connections for ranges up to 10,000 PSI.



Autoclave Pressure Connection:
9/16"-18 UNF High Pressure Female Autoclave style fitting - optional for 10,000 PSI, required for ranges 15,000 and above. (Also requires user supplied tubing assembly).

Specifications subject to change without notice.

May
2021

Palmer Wahl Instruments, Inc. • www.palmerwahl.com

Recorder Charts and Pens

Palmer Recorders use superior quality chart paper and pens engineered to work together for optimum performance and accuracy.

Recorder Charts

Palmer Recorder Charts: Our superior quality charts meet or exceed OEM standards for accuracy and performance. Charts are manufactured to provide stiffness and curl control for use in the field for normal and high stress conditions. A wide assortment of single, dual and triple range charts are available in both 8" and 12" diameters, in a large selection of rotation speeds. Charts are packaged 100 per box.

Standard Palmer Recorder charts have an Arc Line of 6-3/8". The top pen follows the arc line. We can supply any maker chart you need, as well as order custom range charts.



Recorder Pens

Palmer Recorder Pens: Our Recorder pens are engineered to produce superior image quality in the most demanding conditions. Our pen assembly transmits the movement of the sensors into a smooth, gliding arc across the chart. This prevents burrowing, resulting in longer pen life and better accuracy and readability.

Palmer Recorder Pens come in different NIB Heights and are installed on separate Pen Arms which have different lengths and heights. This enables the pens to overlap and operate independently of each other. On a standard Recorder the Top Pen follows the Arc Line of 6-3/8".

Replaceable fine point, felt tip pens are available in packages of 5 in Red, Blue, Green, and Black. Be sure to order the correct pen for the desired position. Standard color pens, shown here, are recommended. Other colors and configurations are available as special order.



Recorder Pen Ordering information						
Pen Arm #	Pen Position	Color	Part Number	1 Pen Recorder	2 Pen Recorder	3 Pen Recorder
RP-3	TOP PEN on 3 Pen Recorder	Red	AR-3714-11-6			Std
		Blue	AR-3714-14-6			
		Green	AR-3714-13-6			
		Black	AR-3714-12-6			
RP-2	ONLY PEN on 1 Pen Recorder TOP PEN on 2 Pen Recorder MIDDLE PEN on 3 Pen Recorder	Red	AR-3714-06-6	Std	Std	
		Blue	AR-3714-09-6			Std
		Green	AR-3714-08-6			
		Black	AR-3714-07-6			
RP-1	BOTTOM PEN on 2 or 3 Pen Recorder	Red	AR-3714-01-6			
		Blue	AR-3714-04-6		Std	
		Green	AR-3714-03-6			Std
		Black	AR-3714-02-6			


Clocks, batteries, charts, pens, liquid infiltration, case finish, and window are not included in the 10 year warranty.



1 Pen Recorder:
ONLY PEN
Order: #RP-2, Red - #AR-3714-06-6 (Standard)




2 Pen Recorder:
TOP PEN, Order: #RP-2, Red - #AR-3714-06-6 (Standard)
BOTTOM PEN, Order: #RP-1, Blue - #AR-3714-04-6 (Standard)

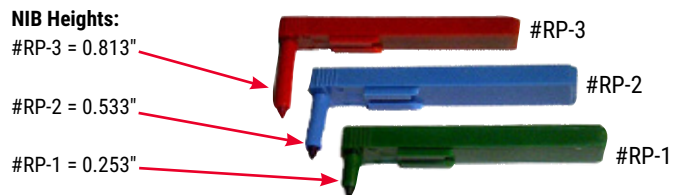


3 Pen Recorder:
TOP PEN, Order: #RP-3, Red - #AR-3714-11-6 (Standard)
MIDDLE PEN, Order: #RP-2, Blue - #AR-3714-09-6 (Standard)
BOTTOM PEN, Order: #RP-1, Green - #AR-3714-03-6 (Standard)

Aluminum Case Dimensional Drawings


Wall Mounted

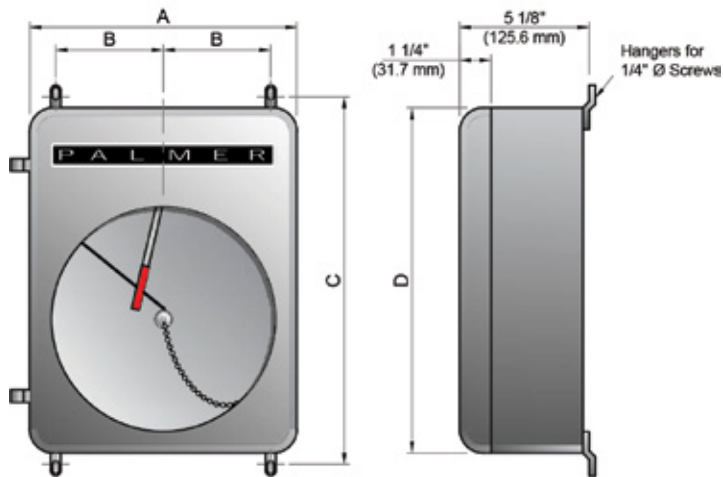


Portable

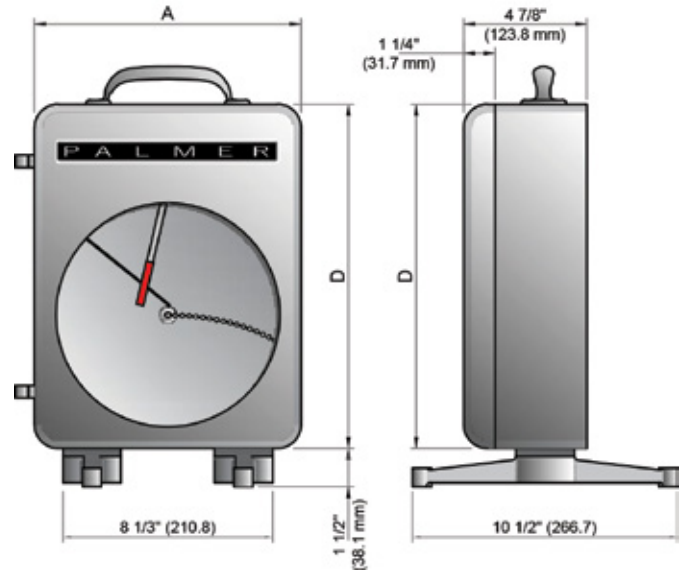


Flush Mounted

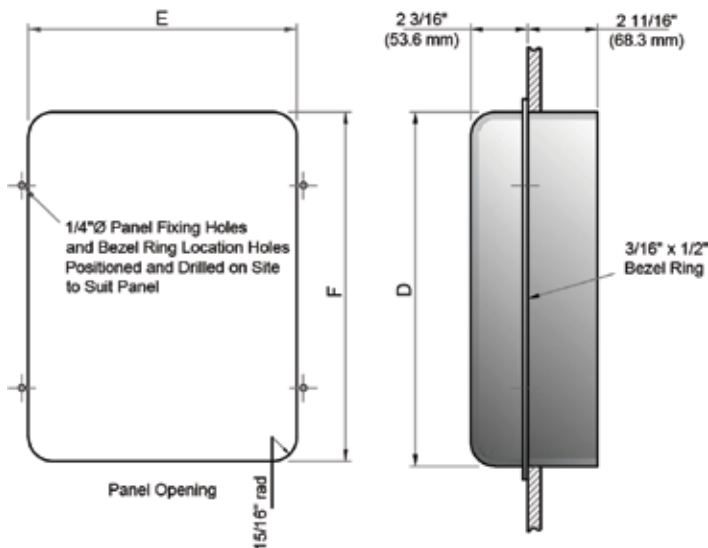

Pipestand Mounted

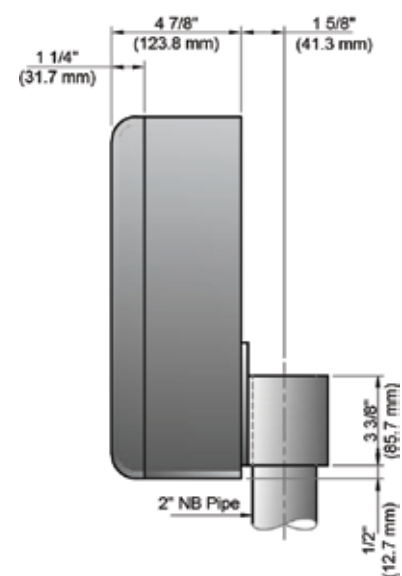

Pedestal Mounted

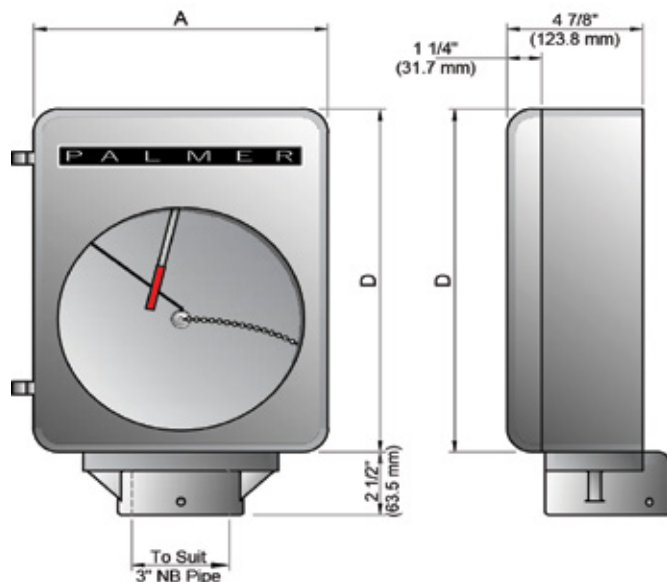

Aluminum Case Recorder Dimensions				
Dimensions	8 inch Case		12 inch Case	
A	10-9/16 in	268.3 mm	13-1/16 in	331.8 mm
B	4-1/4 in	107.9 mm	4-1/2 in	114.3 mm
C	14-1/2 in	361.9 mm	16-3/8 in	415.9 mm
D	13-5/8 in	346.0 mm	15-13/16 in	401.6 mm
E	10-5/16 in	261.9 mm	12-13/16 in	325.4 mm
F	13-7/16 in	341.3 mm	15-9/16 in	395.3 mm
Weights	8 inch Case		12 inch Case	
Empty Box	approx 12 lbs (5.44 kg)		approx 16 lbs (7.25 kg)	
Weight depends on Case style and # of systems				

Circular Chart Recorders - All Types - Ordering Guide

CIRCULAR CHART RECORDERS - ALL TYPES

Step 1 - Select: Chart Recorder Type

Code	Chart Recorder Type
1	Pressure System
2	Temperature System
3	Pressure & Temperature System
4	Valve System* - On/Off Valve, Standard (Valve & Test System with On/Off Valve and Pete's Plug, contact Customer Service for quote)

Step 2 - Select: Chart Recorder Size

Code	Chart Recorder Size
2	12 inch Aluminum
8	8 inch Aluminum
P	8 inch Pelican Case (Wall, Portable or Pipestand only. Number of pens/systems available for each Recorder Mounting Type may be limited.)
R	12 inch Pelican Case (Wall, Portable or Pipestand only. Number of pens/systems available for each Recorder Mounting Type may be limited.)

Step 3 - Select: Chart Recorder Mounting Style

Code	Chart Recorder Mounting Style
2	Wall Mount - Pull Latch with Hasp - Standard
3	Flush Mount - includes Black Lever Style Handle. Not Available in Pelican Case
4	Pipestand Mount - Pull Latch with Hasp - Standard
5	Portable - Pull Latch with Hasp - Standard
8	Pedestal Mount - 3 inch Slip-On Connection, Pull Latch with Hasp - Standard. Pressure Systems only. Not Available in Pelican Case.

* Not available in 12" Pelican Case

Important Note: This order guide shows the main choices to be made when ordering a Recorder. There are additional items to be specified. Please visit palmwerwahl.com/Recorders and click on the type of recorder you are interested in to access the Recorder Order Guide which can be found on each product page. If you prefer, please call our Customer Service Department for help from a representative.

Recorder Type	Recorder Size	Recorder Mounting Style
Insert Codes in boxes above to build part number		

BESTOBELL
AQUATRONIX
SINCE/DEPUIS 1953

Head Office
2880 Argentia Road, Unit 3
Mississauga, ON L5N 7X8
salesdesk@bestobell.com
1-800-668-3979
www.bestobell.com

Montréal Office
970 Montée de Liesse, #204
St.Laurent, QC H4T 1W7
ventes@bestobell.com
1-877-331-1225

Atlantic Office
166 North Side Road
Riverport, NS B0J 2W0
dmossman@bestobell.com
902-529-0355

Since 1953, Quality Products to Sense, Measure & Control
Depuis 1953, Produits De Qualités Pour Détecter, Mesurer & Contrôler



Palmer Wahl
BEYOND THE SCALE

Palmer Wahl Instruments, Inc. • www.palmerwahl.com

Specifications subject to change without notice.

May
2021